
	DDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDD	
--	--	--

EXE

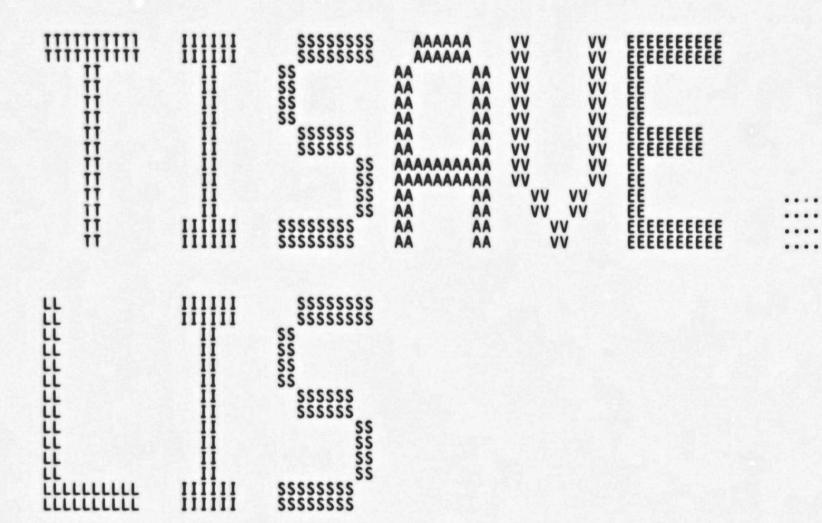

111234567890123456789012345678901234567890

EDT\$TISAVE V04-000	EDTSTISAVE - buffer a character for the journal 16-Sep-1984 01:56:37 Declarations	VAX-11 Bliss-32 V4.0-742 DISK\$VMSMASTER:[EDT.SRC]TISAVE.BLI;1 (2
52 53 55 55 56 57 56 57 56 66 66 66 66 67 77 77 77 77 77 77 77 77	0051 1 %SBTTL 'Declarations' 0052 1	

```
EDT$TISAVE
V04-000
                     EDTSTISAVE - buffer a character for the journal 16-Sep-1984 01:56:37 EDTSSTI_BUFCH - buffer a character for the jou 14-Sep-1984 12:24:58
                                                                                                                     VAX-11 Bliss-32 V4.0-742
DISK$VMSMASTER:[EDT.SRC]TISAVE.BLI;1
                                %SBTTL 'EDT$$TI_BUFCH - buffer a character for the journal file'
   0655789012345656789012345657890123456578901234
                                GLOBAL ROUTINE EDTSSTI_BUFCH (
                                                                                                ! Buffer a character for the journal file ! Character to be buffered
                                     ) : NOVALUE =
                                  FUNCTIONAL DESCRIPTION:
                                          This routine saves a character for the journal file. If the journal output buffer is full, then it is written out, then the character is placed in the buffer.
                                  FORMAL PARAMETERS:
                                    BUF
                                                                The character to be saved.
                                  IMPLICIT INPUTS:
                                          EDTSST TIN OBUF
                                          EDT$$G_TIN_OBUFPOS
                                  IMPLICIT OUTPUTS:
                                          EDT$$G_TIN_OBUFPOS
                                  ROUTINE VALUE:
   112
113
114
115
116
117
                                          NONE
                                  SIDE EFFECTS:
                                          May write a record on the journal file.
   118
119
120
121
123
124
125
126
127
128
130
131
133
134
                                     BEGIN
                                     EXTERNAL ROUTINE
                                          EDT$$TI_FLUSHJOUFI : NOVALUE;
                                     EXTERNAL
                                          EDT$$T_TIN_OBUF : VECTOR [256, BYTE],
                                                                                                ! The journal output buffer
                                          EDT$$G_TIN_OBUFPOS;
                                                                                                ! Position in journal output buffer
                                     IF (.EDT$$G_TIN_OBUFPOS EQL 254) THEN EDT$$TI_FLUSHJOUFI (%C'T');
                                     EDT$$T_TIN_OBUF [.EDT$$G_TIN_OBUFPOS] = .BUF;
                                     EDT$$G_TIN_OBUFPOS = .EDT$$G_TIN_OBUFPOS +
                                                                                                  of routine EDT$$TI_BUFCH
                                                                                                  .TITLE EDT$TISAVE EDT$TISAVE - buffer a character for
                                                                                                                            the journal
                                                                                                  .IDENT \V04-000\
                                                                                                  .EXTRN EDT$$TI_FLUSHJOUFI
```

FUTON FATORY TIN COUR	
.EXTRN EDT\$\$T_TIN_OBUF .EXTRN EDT\$\$G_TIN_OBUFPOS .PSECT EDT\$CODE_NOWRT SHR PIC.2	
0004 00000 .ENTRY EDT\$\$TI_BUFCH, Save R2 00 9E 00002 MOVAB EDT\$\$G_TIN_OBUFPOS, R2 62 D1 00009 CMPL EDT\$\$G_TIN_OBUFPOS, #254	0657 0700
8F 9A 00012 MOVZBL #84, -(SP) 01 FB 00016 CALLS #1, EDT\$\$TI_FLUSHJOUFI 62 DO 0001D 1\$: MOVL EDT\$\$G_TIN_OBUFPOS, RO AC 90 00020 MOVB BUF, EDT\$\$T_TIN_OBUFERO]	0702 0703 0704
00 62 0B 8F 01 62	.PSECT _EDT\$CODE,NOWRT, SHR, PIC,2 .ENTRY EDT\$\$TI_BUFCH, Save R2 .PSECT _EDT\$\$G_TIN_OBUFPOS, R2 .DI 00009

; Routine Size: 44 bytes, Routine Base: _EDT\$CODE + 0000

: 135 0705 1 : 136 0706 1 !<BLF/PAGE>

EDTSTISAVE - buffer a character for the journal 16-Sep-1984 01:56:37 EDTSSTI_BUFCH - buffer a character for the jou 14-Sep-1984 12:24:58 EDTSTISAVE VAX-11 Bliss-32 V4.0-742 DISK\$VMSMASTER: [EDT. SRC]TISAVE.BLI; 1 138 139 140 1 END ! of module EDT\$TISAVE 0 ELUDOM

Attributes

PSECT SUMMARY

Name Bytes

_EDT\$CODE 44 NOVEC, NOWRT, RD , EXE, SHR, LCL, REL, CON, PIC, ALIGN(2)

Library Statistics

----- Symbols -----Pages Processing File Total Loaded Percent Mapped Time _\$255\$DUA28:[EDT.SRC]EDT.L32;1 _\$255\$DUA28:[EDT.SRC]PSECTS.L32;1 377 40 00:00.2

COMMAND QUALIFIERS

BLISS/CHECK=(FIELD, INITIAL, OPTIMIZE)/NOTRACEBACK/LIS=LIS\$:TISAVE/OBJ=OBJ\$:TISAVE MSRC\$:TISAVE.BLI/UPDATE=(ENH\$:TISAVE)

44 code + 0 data bytes 00:09.2 00:11.7 Size:

Run Time: Elapsed Time: Lines/CPU Min: ; Lexemes/CPU-Min: 12613 ; Memory Used: 54 pages ; Compilation Complete 0140 AH-BT13A-SE

DIGITAL EQUIPMENT CORPORATION CONFIDENTIAL AND PROPRIETARY

